


# BENCHTOP OSCILLOSCOPE



BOS200, \$499, shown smaller than actual size.

BOS Series Starts at  
**\$499**

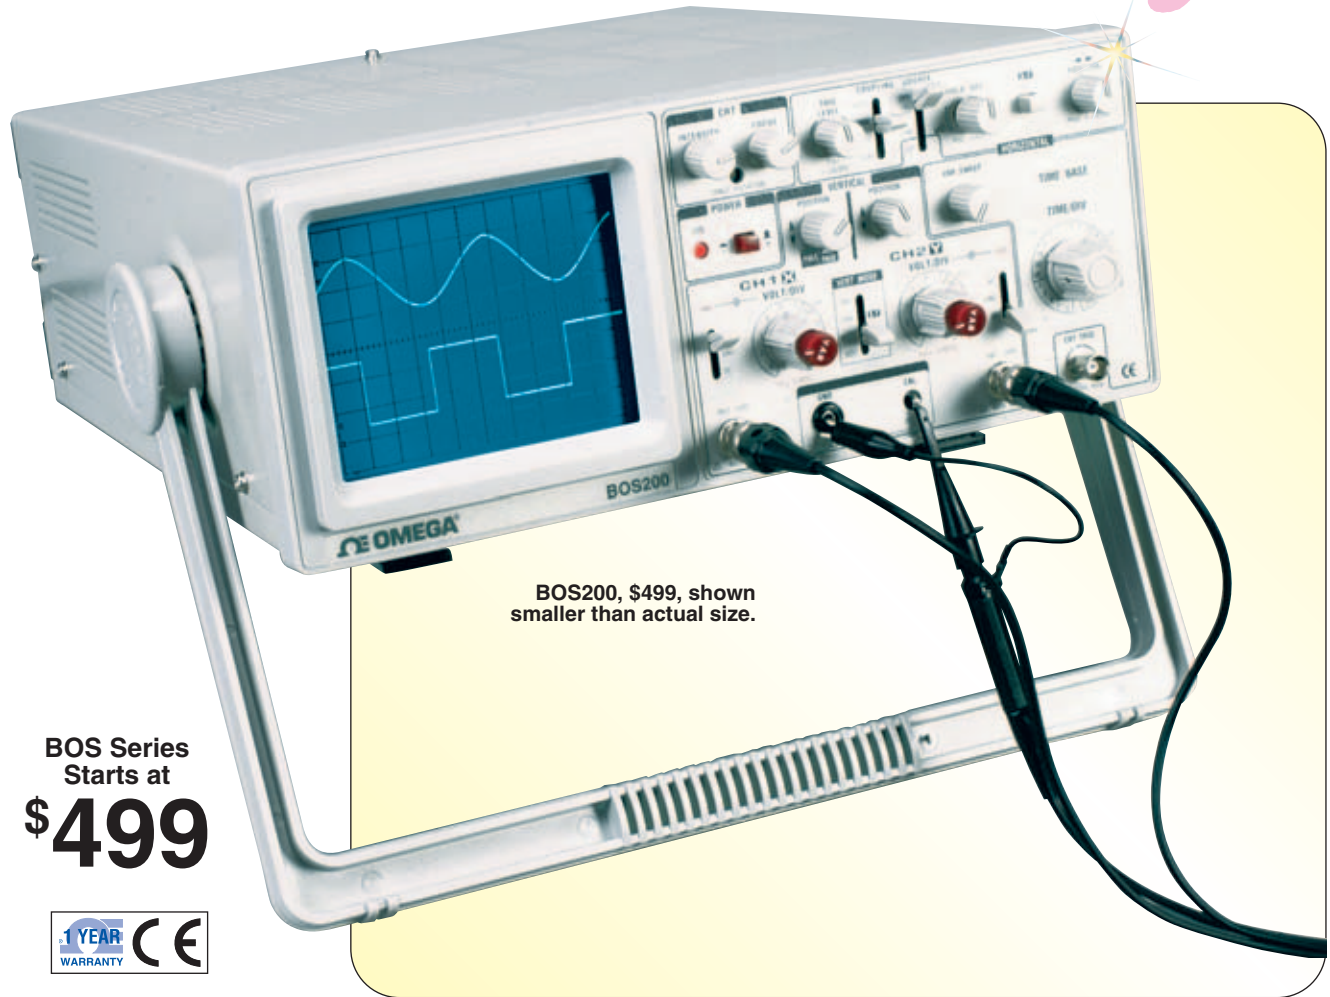

- ✓ 20 to 60 MHz Dual Trace, ALT Trigger
- ✓ Vertical Sensitivity: 1 mV/DIV
- ✓ Horizontal Resolution: 10 nS
- ✓ Hold-Off, X-Y Operation, Z-Mod, Y-Output
- ✓ 23 Calibrated Ranges, Main Time Base

The BOS Series comprises dual-channel oscilloscopes with frequency bandwidths of 40 to 100 MHz at -3 dB, a maximum sweep of 10 ns, a maximum sensitivity of 1 mV/DIV, and 150 mm rectangular CRT with internal graticule.

These oscilloscopes are rugged, easy to operate, and highly reliable. They are ideal for research,

production, and electronics applications. The BOS converts a high-input differential voltage ( $\leq 1300$  Vp) into a low voltage ( $\leq 6.5$  V).

Optional accessories include differential voltage probes, which provide a safe means of measuring a floating potential.

**MOST POPULAR MODELS HIGHLIGHTED!**

To Order (Specify Model Number)		
Model No.	Price	Description
BOS-200	\$499	20 MHz analog oscilloscope
BOS-205	590	20 MHz with delay sweep
BOS-350	650	40 MHz analog oscilloscope
BOS-355	725	40 MHz with delay sweep
BOS-605	1050	60 MHz with delay sweep

Comes with power cord, 110V fuse, 220V fuse, plastic screwdriver, 2 probes.

Ordering Example: BOS-200, 20 MHz analog oscilloscope, \$499.

## Accessories

Model No.	Price	Description
BOSP-260	\$30	Oscilloscope probe for 60 MHz bandwidth x1, x10
BOSP-9100	50	Oscilloscope probe for 100 MHz bandwidth x1, x10



## Specifications

Models	BOS-200	BOS-205	BOS-350	BOS-355	BOS-605
<b>Cathode Ray Tube</b>	6" diagonal, rectangular screen with internal graticule 8 x 10 DIV (1 DIV = 1 cm), B31 phosphor, 2 kV acceleration voltage			6" diagonal, rectangular screen with internal graticule 8 x 10 DIV (1 DIV = 1 cm), B31 phosphor, 12 kV accel voltage	
<b>Vertical Deflection</b>					
<b>Bandwidth</b>	DC to 20 MHz (-3 dB)		DC to 40 MHz (-3 dB)		DC to 60 MHz (-3 dB)
<b>Sensitivity</b>	1 mV/DIV to 1 V/DIV (5 MHz, -3 dB), x5 gain selected 5 mV/DIV to 5 V/DIV		1 mV/DIV to 1 V/DIV (10 MHz, -3 dB), x5 gain selected 5 mV/DIV to 5 V/DIV		1 mV/DIV to 1 V/DIV (15 MHz, -3 dB), x5 gain selected 5 mV/DIV to 5 V/DIV
<b>Attenuator</b>	1-2-5 sequence, 10 step with variable control				
<b>Input Impedance</b>	1 MΩ ±2%, 25 pF ± 10%				
<b>Max Input Voltage</b>	400 V (DC + AC peak)				
<b>Rise Time</b>	About 17.5 ns		About 8.8 ns		About 5.8 ns
<b>Overshoot</b>	Less than 5%				
<b>Operation Mode</b>	CH 1, CH 2, DUAL (ALT, CHOP)				
<b>Algebraic Addition</b>	CH 1 + CH 2, CH 1 - CH 2				
<b>Inverter</b>	CH 2 Only				
<b>Horizontal Deflection</b>					
<b>X-Y Mode</b>	Switch selectable using X-Y switch; CH 1: X axis, CH 2: Y axis				
<b>Accuracy</b>	X Axis: ±6%, Y Axis: ±3%				
<b>Bandwidth</b>	DC to 1 MHz (-3 dB)				
<b>X-Y Phase Difference</b>	Approx. 3 degrees at 50 kHz				
<b>Sweep System</b>					
<b>Sweep Display Mode</b>	Main, Mix	Main, Mix, Delay	Main, Mix	Main, Mix, Delay	Main, Mix, Delay
<b>Hold-Off Time</b>	5:1 continuously variable				
<b>Main Sweep</b>					
<b>Sweep Speed</b>	0.1 μs/DIV to 2.0 s/DIV in 1-2-5 sequence, 23 steps				
<b>Accuracy</b>	±3%				
<b>Variable Time Control</b>	5:1, uncalibrated, continuously variable between steps				
<b>Sweep Magnification</b>	10x, ±10%, extended sweep speed up to 10 ns/DIV				
<b>Delay Sweep</b>					
<b>Sweep Speed</b>	0.1 μs/DIV to 2.0 s/DIV in 1-2-5 sequence, 23 steps		0.1 μs/DIV to 2.0 s/DIV in 1-2-5 sequence, 23 steps		
<b>Accuracy</b>	±3%		±3%		
<b>Sweep Magnification</b>	10x, ±10%, extended sweep speed up to 10 ns/DIV		10x, ± 10%, extended sweep speed up to 10 ns/DIV		
<b>Delay Timeposition</b>	Variable control to locate desirable waveform for extending		Variable control to locate desirable waveform for extending		
<b>Triggering</b>					
<b>Trigger Coupling</b>	AUTO, NORM TV-V, TV-H		AUTO, NORM TV-V, TV-H		
<b>Trigger Source</b>	CH 1, CH 2, ALT, LINE, EXT		CH 1, CH 2, ALT, LINE, EXT		
<b>Slope</b>	±		±		
<b>Trigger Sensitivity</b>					
<b>Coupling</b>	TV-V, TV-H, Auto, Nom				
<b>Bandwidth</b>	DC to 1 kHz, 1 kHz to 100 kHz, 100 Hz to 20 MHz, 100 Hz to 20 MHz				
<b>Interior</b>	1.0 DIV, 1.5 DIV, 1.0 DIV, 0.5 Vp-p				
<b>Exterior</b>	0.5 Vp-p				
<b>Dimensions</b>	324 W x 398 D x 132 mm H (12.75 x 15.67 x 5.20")				
<b>Net Weight</b>	Approx. 7.6 kg (16.75 lb)				
<b>Rated Range of Use</b>	10 to 35°C (50 to 95°F), 10 to 80% RH				
<b>Component Test</b>					
<b>Test Voltage</b>	Max 6 Vrms (open circuit)		Max 6 Vrms (open circuit)		
<b>Test Current</b>	Max 11 mA (shorted)		Max 11 mA (shorted)		
<b>Test Frequency</b>	Line frequency		Line frequency		
<b>Components</b>	Capacitor, inductor, diode, transistor, zener, etc.		Capacitor, inductor, diode, transistor, zener, etc.		
<b>CH 2 Output</b>					
<b>Output level</b>	100 mV (no load), 50 mV/DIV (with 50 Ω load)		100 mV (no load), 50 mV/DIV (with 50 Ω load)		
<b>Bandwidth</b>	20 Hz to 20 MHz		20 Hz to 40 MHz		20 Hz to 60 MHz
<b>Graticule Illumination</b>	Adjustable		Adjustable		
<b>Calibrator</b>	Square wave about 1 kHz, 2V p-p ±3%		Square wave about 1 kHz, 2V p-p ±3%		
<b>Z-Modulation</b>	Positive TTL signal, low-level blank intensity at any intensity, high-level unblank any intensity		Positive TTL signal, low-level blank intensity at any intensity, high-level unblank any intensity		
<b>Trace Rotation</b>	Adjustable on front panel		Adjustable on front panel		
<b>Power Source</b>	110 to 130V (800 mA fuse), 200 to 260V (600 mA fuse) 50/60 Hz selectable				
<b>Power Consumption</b>	Approx. 38 W				
<b>Limits of Operation</b>	0 to 50°C (32 to 122°F), 10 to 80% RH				
<b>Storage Environment</b>	-30 to 70°C (-22 to 158°F), 10 to 90% RH				



#### UNITED STATES

[www.omega.com](http://www.omega.com)  
1-800-TC-OMEGA  
Stamford, CT.

#### CANADA

[www.omega.ca](http://www.omega.ca)  
Laval(Quebec)  
1-800-TC-OMEGA

#### GERMANY

[www.omega.de](http://www.omega.de)  
Deckenpfronn, Germany  
0800-8266342

#### UNITED KINGDOM

[www.omega.co.uk](http://www.omega.co.uk)  
Manchester, England  
0800-488-488

#### FRANCE

[www.omega.fr](http://www.omega.fr)  
Guyancourt, France  
088-466-342

#### CZECH REPUBLIC

[www.omegaeng.cz](http://www.omegaeng.cz)  
Karviná, Czech Republic  
596-311-899

#### BENELUX

[www.omega.nl](http://www.omega.nl)  
Amstelveen, NL  
0800-099-33-44



## More than 100,000 Products Available!

### • Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Glass Bulb Thermometers, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders Relative Humidity Measurement Instruments, RTD Probes, Elements and Assemblies, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples Thermowells and Head and Well Assemblies, Transmitters, Wire

### • Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

### • pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

### • Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

### • Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Strain Gages, Torque Transducers, Valves

### • Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters