



Sanitary RTD Probes

Standard Duty with M12 Connector

PRS-S-M12 Series

\$110
All Models



74-03

Provides Quick and Easy Installation in CIP and Sanitary Processes

4-pin M12 connector plug.

316L SS 1½" 16 AMP Tri-Grip™ cap standard.

PRS-3-100-A-S-0300-D1-M12, \$110, shown actual size.

- ✓ Standard Duty ¼" Probe Diameter
- ✓ 1½" 16 AMP Tri-Grip™ (Tri-Clamp® Compatible) Fitting Standard
- ✓ 4-Wire M12 Male Connector Standard
- ✓ 316L SS Wetted Surfaces with 32 µin or Better Finish
- ✓ 4-Wire Pt100 Class A Element Standard
- ✓ -50 to 200°C (-58 to 392°F) Temperature Range

Options

- ✓ Fitting Styles
- ✓ Probe Lengths
- ✓ RTD Elements

Sensor Flange Size Range ¼" to 4" Tri-Grip™ Process Flange. See Page C-16 for Details




¼" diameter.

32 µin Finish

Probe length

The OMEGA® PRS-S-M12 Series RTD probes are available in standard lengths from 3 to 6", with a 4-wire Pt100 Class A element (100 ±0.06 Ω at 0°C) that is compatible with 3-wire RTD instrumentation. Standard features include a 1½" 16 AMP Tri-Grip™ fitting and 4-wire M12 male connector termination. Please consult sales for available options, including element types and curves, probe lengths, and sanitary fitting styles.

See Pages C-34 and C-35 for M12 Transmitter Options

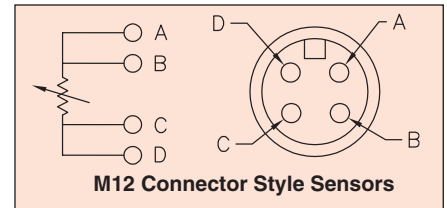

■ MOST POPULAR MODEL HIGHLIGHTED!

To Order (Specify Model Number)

Model No.	Price	Lead Wire Style	Ω At 0°C	Sheath Diameter	Probe Length
PRS-3-100-A-S-0300-D1-M12	\$110	4-Wire	100	¼"	3"
PRS-3-100-A-S-0400-D1-M12	110	4-wire	100	¼"	4"
PRS-3-100-A-S-0500-D1-M12	110	4-wire	100	¼"	5"
PRS-3-100-A-S-0600-D1-M12	110	4-wire	100	¼"	6"

See page C-28 for M12C series cables with M12 connectors.

Note: Please consult sales for available options, including element types and curves, probe lengths, and sanitary fitting styles.

Ordering Examples: PRS-3-100-A-S-0400-D1-M12, 4-wire Pt100 RTD sensor (100 Ω @ 0°C, Class A accuracy), 1½" 16 AMP Tri-Grip™ fitting, 4" length, standard duty probe, M12 male connector, and M12C-PVC-4-S-F-5, 5 m (16.4') PVC cable with M12 connector and stripped lead termination, \$110 + 15.50 = **\$125.50**.

PRS-3-100-A-S-0500-D1-M12, 4-wire Pt100 RTD sensor (100 Ω @ 0°C, Class A accuracy), 1½" 16 AMP Tri-Grip™ fitting, 5" length, standard duty probe, M12 male connector, and M12C-PVC-4-S-F-5, 5 m (16.4') PVC cable with M12 connector and stripped lead termination, \$110 + 15.50 = **\$125.50**.

Sanitary RTD Probes

Heavy-Duty with M12 Connector



PRS-H-M12 Series

\$140
All Models



74-03

Provides Quick and Easy Installation in CIP and Sanitary Processes


- ✓ Heavy Duty Probe Design with Stepped Probe Stem for Additional Strength
- ✓ 1½" 16 AMP Tri-Grip™ (Tri-Clamp® Compatible) Fitting Standard
- ✓ 4-Wire M12 Male Connector Standard
- ✓ 316L SS Wetted Surfaces with 32 µin or Better Finish
- ✓ 4-Wire Pt100 Class A Element Standard
- ✓ -50 to 200°C (-58 to 392°F) Temperature Range

Options


- ✓ Fitting Styles
- ✓ Probe Lengths
- ✓ RTD Elements

Sensor Flange Size Range ¾" to 4" Tri-Grip™ Process Flange. See Page C-16 for Details

The OMEGA® PRS-H-M12 Series RTD probes are available in standard lengths from 3 to 6", with a 4-wire Pt100 Class A element (100 ±0.06 Ω at 0°C) that is compatible with 3-wire RTD instrumentation. These heavy-duty probes have a ¾" diameter, which steps down to a ⅝" dia at the probe tip, for fast response and additional strength. Standard features include a 1½" 16 AMP Tri-Grip™ fitting and 4-wire M12 male connector termination. Please consult sales for available options, including element types and curves, probe lengths, and sanitary fitting styles.

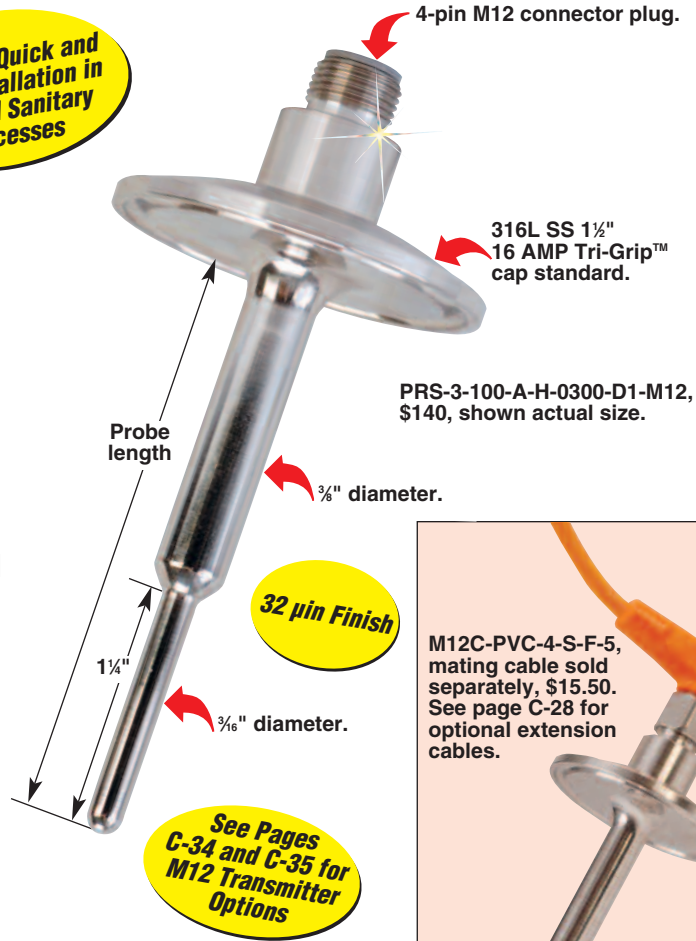

See Pages C-34 and C-35 for M12 Transmitter Options

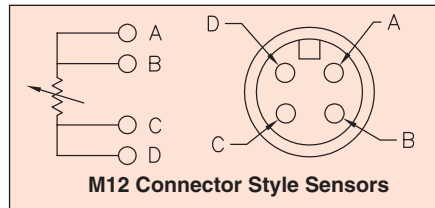

MOST POPULAR MODEL HIGHLIGHTED!

To Order (Specify Model Number)					
Model No.	Price	Lead Wire Style	Ω at 0°C	Sheath Diameter	Probe Length
PRS-3-100-A-H-0300-D1-M12	\$140	4-wire	100	¾"	3"
PRS-3-100-A-H-0400-D1-M12	140	4-wire	100	¾"	4"
PRS-3-100-A-H-0500-D1-M12	140	4-wire	100	¾"	5"
PRS-3-100-A-H-0600-D1-M12	140	4-wire	100	¾"	6"

See page C-28 for M12C series cables with M12 connectors.

Note: Please consult sales for available options, including element types and curves, probe lengths, and sanitary fitting styles.

Ordering Examples: PRS-3-100-A-H-0400-D1-M12, 4-wire Pt100 RTD sensor (100 Ω @ 0°C, Class A accuracy), 1½" 16 AMP Tri-Grip™ fitting, 4" length, heavy-duty probe, M12 male connector, and M12C-PVC-4-S-F-5, 5 m (16.4') PVC cable with M12 connector and stripped lead termination, \$110 + 15.50 = **\$125.50**.

PRS-3-100-A-H-0300-D1-M12, 4-wire Pt100 RTD sensor (100 Ω @ 0°C, Class A accuracy), 1½" 16 AMP Tri-Grip™ fitting, 3" length, heavy-duty probe, M12 male connector, **\$110**.



UNITED STATES

www.omega.com
1-800-TC-OMEGA
Stamford, CT.

CANADA

www.omega.ca
Laval(Quebec)
1-800-TC-OMEGA

GERMANY

www.omega.de
Deckenpfronn, Germany
0800-8266342

UNITED KINGDOM

www.omega.co.uk
Manchester, England
0800-488-488

FRANCE

www.omega.fr
Guyancourt, France
088-466-342

CZECH REPUBLIC

www.omegaeng.cz
Karviná, Czech Republic
596-311-899

BENELUX

www.omega.nl
Amstelveen, NL
0800-099-33-44



More than 100,000 Products Available!

• Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Glass Bulb Thermometers, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders Relative Humidity Measurement Instruments, RTD Probes, Elements and Assemblies, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples Thermowells and Head and Well Assemblies, Transmitters, Wire

• Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

• pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

• Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

• Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Strain Gages, Torque Transducers, Valves

• Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters