

NEMA MOTOR STARTERS




**N101 Series
Starts at
\$329**



- 24 Vdc Control Power—Safe, Reliable Global Standard
- Unique Pulse Width Modulated (PWM) Coil Controller Minimizes Coil Power Consumption
- Microprocessor-Based Control
- Phase Loss and Current Unbalance Protection, User Selectable
- Ambient Compensated Overload
- Motor Temperature and Power-Up Protection with Thermal Memory
- Easily Accessible Mounting Feet for Panel Mounting
- LED Status Indication—Trip, Trip Class, Motor Thermal State, Reset, Overload State
- Unique “Alarm Without Trip” Option for Critical Must Run Applications
- -40 to 65°C (-40 to 149°F) Operating Temperature
- Wide 3.2:1 Current Adjustment Range
- Exclusive Internal 24-Bit Floating Point Math Calculations with RMS Calibrated Current Measurement
- Meets or Exceeds Global Standards for EMC (Electromagnetic Compatibility) Immunity and Emissions
- IP20 Finger Protection
- Motor Running Thermal Utilization Indication
- Manual, Automatic or Remote Reset
- DIN Rail Mountable, Size 00 to 2
- Solid-State Alarm Output Indication

The Cutler-Hammer® Electro-Mechanical Starter consists of an electro-mechanical contact block or contactor and electro-mechanical solid-state overload relay as a full voltage non-reversing (FVNR) device. Size 00 to 2 motor starters are factory assembled.

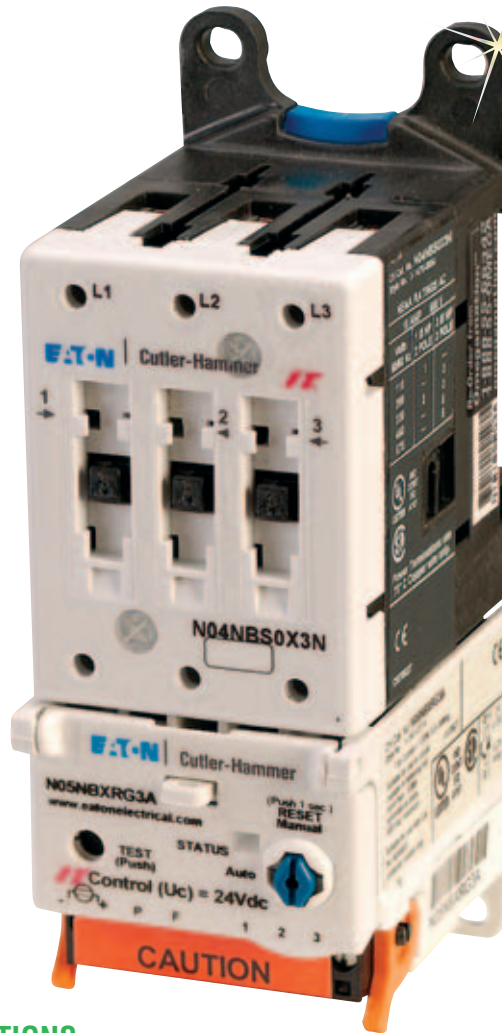

SPECIFICATIONS

Dimensions:

- Size 00 and 0: 45 W x 127 H x 63 mm D (1.8 x 5.0 x 2.5")
- Size 1: 54 W x 138 H x 63 mm D (2.1 x 5.4 x 2.5")
- Size 2: 76 W x 150 H x 79 mm D (3.0 x 5.9 x 3.1")

Mounting Hole Spacing:

- Size 00 and 0: 33.8 W x 117.3 mm H (1.33 x 4.62")
- Size 1: 37 W x 128 mm H (1.46 x 5.04")
- Size 2: 24 W x 73 mm H (0.94 x 2.87")

Weight:

- Size 00 and 0: 0.40 kg (0.9 lb)
- Size 1: 0.53 kg (1.2 lb)
- Size 2: 1.32 kg (2.9 lb)

Mechanical Operating Rate

- (No Load Condition):
- Size 00 and 0: 3/sec
 - Size 1: 3/sec
 - Size 2: 2/sec

Mechanical Life (Operations):

- Size 00 and 0: 10,000,000
- Size 1: 10,000,000
- Size 2: 8,000,000

N101BS0G3A, \$410, shown smaller than actual size.

Humidity: 95% non-condensing

Insulation Voltage (Ui): 690V

Impulse Withstand Voltage (Uimp): 6 kV

Coil Voltage (Nominal): 24 Vdc

Coil Operating Voltage Range: 20 to 28 Vdc

Operating Temperature: -40 to 65°C (40 to 149°F)

Storage Temperature: -50 to 80°C (-58 to 176°F)

Shock/Vibration: 15G/5G

Pull-In Time @ 24V—No Debounce:

- Size 00 and 0: 15 mS
- Size 1: 15 mS
- Size 2: 25 mS

Pull-In Time @ 24V—With Debounce:

- Size 00 and 0: 75 mS
- Size 1: 80 mS
- Size 2: 88 mS



**FULL VOLTAGE NON-REVERSING DC-OPERATED, OPEN TYPE STARTERS (SIZE 00 TO 2)
WITH 3-POLE SOLID STATE OVERLOAD PROTECTION**

MODEL NO.	NEMA SIZE	CONTINUOUS AMPERE RATING	OVERLOAD ADJUSTMENT RANGE (AMPERES)	MAX UL HORSEPOWER (HP) 60 HZ 3-PHASE				MAX UL HORSEPOWER (HP) 50 HZ 3-PHASE
				200V/ 208V	230V/ 240V	460V/ 480V	575V/ 600V	380V
N101BSAA3A	00	9	0.25 to 0.8	1.5	1.5	2	2	1.5
N101BSAB3A	00	9	0.59 to 1.9	1.5	1.5	2	2	1.5
N101BSAC3A	00	9	1.4 to 4.4	1.5	1.5	2	2	1.5
N101BS0C3A	0	18	1.4 to 4.4	3	3	5	5	5
N101BS0D3A	0	18	2.8 to 9.0	3	3	5	5	5
N101BS0G3A	0	18	6.3 to 20	3	3	5	5	5
N101CS1B3A	1	27	0.59 to 1.9	7.5	7.5	10	10	10
N101CS1C3A	1	27	1.4 to 4.4	7.5	7.5	10	10	10
N101CS1D3A	1	27	2.8 to 9.0	7.5	7.5	10	10	10
N101CS1F3A	1	27	5.0 to 16	7.5	7.5	10	10	10
N101CS1H3A	1	27	8.4 to 27	7.5	7.5	10	10	10
N101DS2H3A	2	45	8.4 to 27	10	15	25	25	25
N101DS2K3A	2	45	14 to 45	10	15	25	25	25

24 Vdc POWER SUPPLY REQUIREMENTS @ 20°C (68°F)

MODEL NO.	NEMA SIZE	SEALED IN		INRUSH		
		WATTAGE	AMPS	WATTAGE	AMPS	DURATION (MS)
N101BSAA3A	00	3.2	0.13	80	3.3	50
N101BSAB3A	00	3.2	0.13	80	3.3	50
N101BSAC3A	00	3.2	0.13	80	3.3	50
N101BS0C3A	0	3.2	0.13	80	3.3	50
N101BS0D3A	0	3.2	0.13	80	3.3	50
N101BS0G3A	0	3.2	0.13	80	3.3	50
N101CS1B3A	1	3.6	0.15	90	3.8	50
N101CS1C3A	1	3.6	0.15	90	3.8	50
N101CS1D3A	1	3.6	0.15	90	3.8	50
N101CS1F3A	1	3.6	0.15	90	3.8	50
N101CS1H3A	1	3.6	0.15	90	3.8	50
N101DS2H3A	2	5	0.21	130	5.4	65
N101DS2K3A	2	5	0.21	130	5.4	65



N101BS0G3A, \$410, shown smaller than actual size.

To Order (Specify Model Number)

MOST POPULAR MODELS HIGHLIGHTED!

MODEL NO.	PRICE	DESCRIPTION
N101BSAA3A	\$329	Full voltage non-reversing, size 00 starter with 0.25 to 0.8 A overload range
N101BSAB3A	329	Full voltage non-reversing, size 00 starter with 0.59 to 1.9 A overload range
N101BSAC3A	329	Full voltage non-reversing, size 00 starter with 1.4 to 4.4 A overload range
N101BS0C3A	410	Full voltage non-reversing, size 0 starter with 1.4 to 4.4 A overload range
N101BS0D3A	329	Full voltage non-reversing, size 0 starter with 2.8 to 9.0 A overload range
N101BS0G3A	410	Full voltage non-reversing, size 0 starter with 6.3 to 20.0 A overload range
N101CS1B3A	475	Full voltage non-reversing, size 1 starter with 0.59 to 1.9 A overload range
N101CS1C3A	475	Full voltage non-reversing, size 1 starter with 1.4 to 4.4 A overload range
N101CS1D3A	475	Full voltage non-reversing, size 1 starter with 2.8 to 9.0 A overload range
N101CS1F3A	475	Full voltage non-reversing, size 1 starter with 5.0 to 16.0 A overload range
N101CS1H3A	475	Full voltage non-reversing, size 1 starter with 8.4 to 27.0 A overload range
N101DS2H3A	865	Full voltage non-reversing, size 2 starter with 8.4 to 27.0 A overload range
N101DS2K3A	865	Full voltage non-reversing, size 2 starter with 14.0 to 45.0 A overload range

Comes complete with wiring diagram and quick set-up guide.

Ordering Examples: N101BSAC3A, full voltage non-reversing, size 00 starter with a 1.4 to 4.4 A overload range, \$329. N101CS1H3A, full voltage non-reversing, size 1 starter with an 8.4 to 27.0 A overload range, \$475.



UNITED STATES

www.omega.com
1-800-TC-OMEGA
Stamford, CT.

CANADA

www.omega.ca
Laval(Quebec)
1-800-TC-OMEGA

GERMANY

www.omega.de
Deckenpfronn, Germany
0800-8266342

UNITED KINGDOM

www.omega.co.uk
Manchester, England
0800-488-488

FRANCE

www.omega.fr
Guyancourt, France
088-466-342

CZECH REPUBLIC

www.omegaeng.cz
Karviná, Czech Republic
596-311-899

BENELUX

www.omega.nl
Amstelveen, NL
0800-099-33-44



More than 100,000 Products Available!

• Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Glass Bulb Thermometers, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders Relative Humidity Measurement Instruments, RTD Probes, Elements and Assemblies, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples Thermowells and Head and Well Assemblies, Transmitters, Wire

• Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

• pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

• Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

• Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Strain Gages, Torque Transducers, Valves

• Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters