



# High Temperature Thermistors

Glass Encapsulated, Up to 200°C (392°F)

55000 Series

**\$22**  
Each




- ✓ Maximum Continuous Use, 200°C (392°F)  
[Short Term Use to 250°C (482°F)]
- ✓ Excellent Long Term Stability
- ✓ Hermetically Sealed Glass Bead
- ✓ Available in 2252, 3000, 5000 and 10,000 Ω Resistances at 25°C (77°F)
- ✓ Tolerance: ±0.2°C From 0 to 70°C (32 to 158°F)
- ✓ 2.4 mm (0.095") Max Diameter Bead
- ✓ #32 AWG, Gold Plated Dumet Leads 63.5 mm (2.5") L

The OMEGA® 55000 Series glass encapsulated thermistors provide a higher temperature alternative to the OMEGA 44000 Series epoxy coated thermistors where needed. With a maximum continuous temperature rating of -80 to 200°C (-112 to 392°F), and intermittent operation to 250°C (482°F), the 55000 can be used in those applications previously out of reach.

With the same small size as our 44000 thermistor Series, and solderable #32 AWG gold plated Dumet leads, the 55000 thermistor can be used interchangeably wherever our 44000 Series thermistors are used.

**Table 1: Steinhart-Hart Constants**

Model No.	R25°C	A	B	C
55004	2252 Ω	1.4705 x 10 <sup>-3</sup>	2.3780 x 10 <sup>-4</sup>	1.0389 x 10 <sup>-7</sup>
55005	3000 Ω	1.4052 x 10 <sup>-3</sup>	2.3692 x 10 <sup>-4</sup>	1.0125 x 10 <sup>-7</sup>
55007	5000 Ω	1.2870 x 10 <sup>-3</sup>	2.3585 x 10 <sup>-4</sup>	9.4346 x 10 <sup>-8</sup>
55016	10,000 Ω	1.1275 x 10 <sup>-3</sup>	2.3441 x 10 <sup>-4</sup>	8.6482 x 10 <sup>-8</sup>

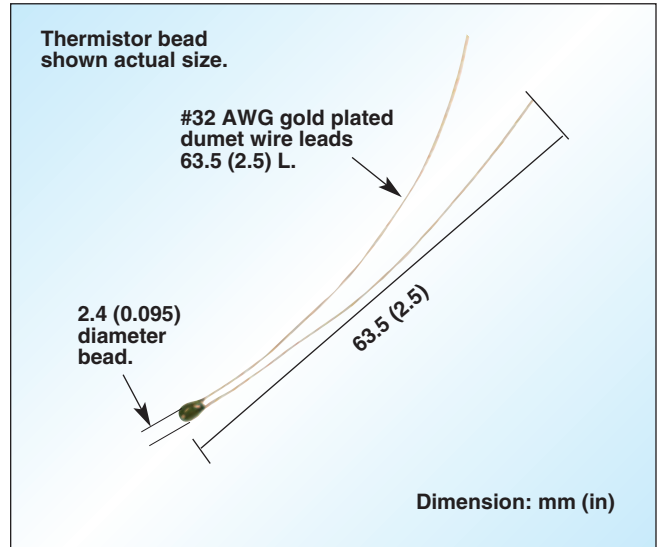

## Resistance Vs. Temperature Characteristics

The Steinhart-Hart Equation has become the generally accepted method for specifying the resistance vs. temperature relationship for thermistors. The Steinhart-Hart equation for temperature as a function of resistance is as follows:

$$\frac{1}{T} = A + B [\ln(R)] + C [\ln(R)]^3$$

where: A, B and C are constants derived from three temperature test points.

R = Thermistors resistance in Ω

T = Temperature in Kelvins K (°C + 275.15)

To determine the thermistor resistance at a specific temperature point, the following equation is used:

$$R = e^{((\beta - (\alpha/2))^{1/3} - ((\beta + (\alpha/2))^{1/3}))}$$

where:

$$\alpha = ((A - (1/T))/C)$$

$$\beta = \text{SQRT}(((B/(3C))^3) + (\alpha^2/4))$$

The A, B and C constants for each of our thermistor selections can be found in Table 1. Using these constants with the above equations, you can determine the temperature of the thermistor based on its resistance, or determine a thermistors resistance at a particular temperature.



### Stability and Drift

Thermistors are generally very accurate and stable devices, but conditions such as over-temperature exposure, thermal or mechanical shock, or subjecting them to over-current conditions can result in a change in resistance. The 55000 Series thermistors are chemically stable and not significantly affected by aging. The following shows typical stability data for the 55016 thermistor:

**Typical Thermometric Drift ( $\pm 0.2^\circ\text{C}$  Elements)**

Operating Temp	10 Months
0°C	<0.01°C
25°C	<0.01°C
100°C	0.12°C
150°C	0.15°C
200°C	0.20°C

### Tolerance Curves

Accuracy tolerances for thermistor sensors are expressed as a percentage of temperature. This is also referred to as interchangeability. The 55000 Series thermistors have a tolerance of  $0.2^\circ\text{C}$  between 0 and  $70^\circ\text{C}$ .

**Table 2: Interchangeability Tolerances**

Temp (°C)	Model No. 55004, $\pm 0.20^\circ\text{C}$	
	$\pm^\circ\text{C}$	$\pm\Omega$
-80	1.00	142,000
-40	0.40	2018
0	0.20	75
40	0.20	10
70	0.20	2.7
100	0.30	1.3
150	1.00	0.9


**Note:** Temperature values ( $^\circ\text{C}$ ) are the same for each tolerance group ( $\pm 0.10$  or  $\pm 0.20$ ), resistance tolerances will change based on resistance at  $25^\circ\text{C}$  ( $77^\circ\text{F}$ ).

### Operating Current and Dissipation Constant

The suggested operating current for bead-style thermistors is approximately 10 to 15 micro-amps. thermistors can experience self-heating effects if they are exposed to operating currents that are high enough to create more heat than the thermistor can dissipate to its surroundings. The 55000 Series thermistors have a dissipation constant of 1.5 milliwatts/ $^\circ\text{C}$  in air.

### Time Constant

The time constant is the time required for a thermistor to react to a step change in temperature. For example, if exposed to a change from 0 to  $100^\circ\text{C}$  (32 to  $212^\circ\text{F}$ ), the 63% time constant would be the time required for the thermistor to indicate a resistance to its value at  $63^\circ\text{C}$  ( $145^\circ\text{F}$ ). The time constant for the 55000 Series thermistor is less than 15 seconds in air.

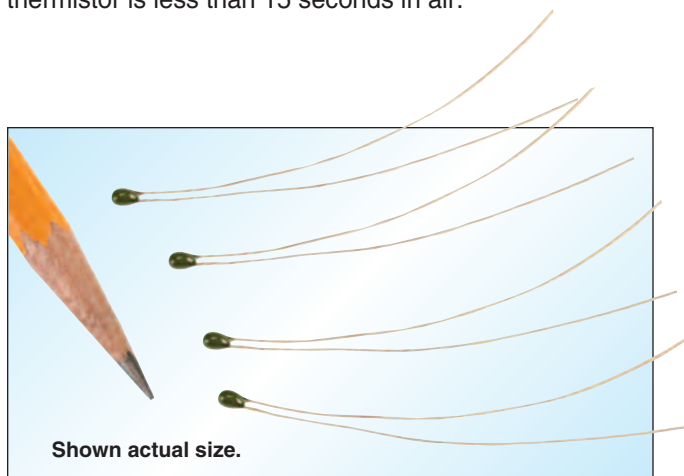

### Discount Schedule

1 to 9	.....Net
10 to 24	.....10%
25 to 49	.....20%
50 to 99	.....30%
100 and over	.....40%

**MOST POPULAR MODELS HIGHLIGHTED!**

To Order (Specify Model Number)							
Model Number	Resistance at $25^\circ\text{C}$	Tolerance (0 to $70^\circ\text{C}$ )	Beta 0 to $50^\circ\text{C}$ (K)	Ratio Ohm 25/ $125^\circ\text{C}$	Best Working Temperature	Short Term Temperature	Price (Each)
55004	2252	$0.2^\circ\text{C}$	3891	29.26	-80 to $200^\circ\text{C}$ (-112 to 392)	$250^\circ\text{C}$ (482°F)	\$22
55005	3000	$0.2^\circ\text{C}$	3891	29.26	-80 to $200^\circ\text{C}$ (-112 to 392)	$250^\circ\text{C}$ (482°F)	22
55007	5000	$0.2^\circ\text{C}$	3891	29.26	-80 to $200^\circ\text{C}$ (-112 to 392)	$250^\circ\text{C}$ (482°F)	22
55016	10000	$0.2^\circ\text{C}$	3891	29.26	-80 to $200^\circ\text{C}$ (-112 to 392)	$250^\circ\text{C}$ (482°F)	22

**Ordering Example:** 55007, thermistor, 5000  $\Omega$  at  $25^\circ\text{C}$  ( $77^\circ\text{F}$ ), 2.4 mm (0.095") max bead diameter with two 63.5 mm (2.5") L gold plated dumet lead wires, \$22.



#### UNITED STATES

[www.omega.com](http://www.omega.com)  
1-800-TC-OMEGA  
Stamford, CT.

#### CANADA

[www.omega.ca](http://www.omega.ca)  
Laval(Quebec)  
1-800-TC-OMEGA

#### GERMANY

[www.omega.de](http://www.omega.de)  
Deckenpfronn, Germany  
0800-8266342

#### UNITED KINGDOM

[www.omega.co.uk](http://www.omega.co.uk)  
Manchester, England  
0800-488-488

#### FRANCE

[www.omega.fr](http://www.omega.fr)  
Guyancourt, France  
088-466-342

#### CZECH REPUBLIC

[www.omegaeng.cz](http://www.omegaeng.cz)  
Karviná, Czech Republic  
596-311-899

#### BENELUX

[www.omega.nl](http://www.omega.nl)  
Amstelveen, NL  
0800-099-33-44



## More than 100,000 Products Available!

### • Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Glass Bulb Thermometers, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders Relative Humidity Measurement Instruments, RTD Probes, Elements and Assemblies, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples Thermowells and Head and Well Assemblies, Transmitters, Wire

### • Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

### • pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

### • Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

### • Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Strain Gages, Torque Transducers, Valves

### • Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters