


Benchtop Oscilloscope



BOS-200, \$499, shown much smaller than actual size.

BOS Series Starts at
\$499

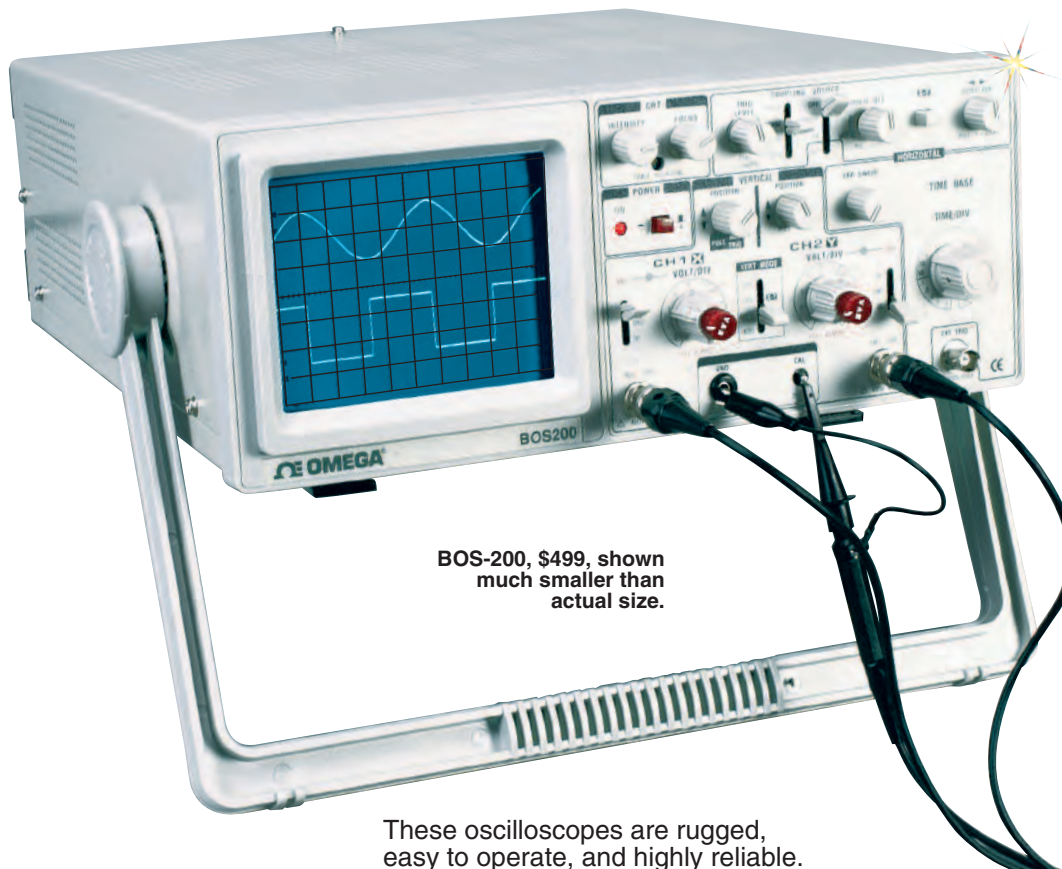

These oscilloscopes are rugged, easy to operate, and highly reliable. They are ideal for research, production, and electronics applications. The BOS converts a high-input differential voltage (≤ 1300 Vp) into a low voltage (≤ 6.5 V).

Optional accessories include differential voltage probes, which provide a safe means of measuring a floating potential.



OMEGACARESM extended warranty program is available for models shown on this page. Ask your sales representative for full details when placing an order. OMEGACARESM covers parts, labor and equivalent loaners.

MOST POPULAR MODELS HIGHLIGHTED!

- ✓ 20 to 60 MHz Dual Trace, ALT Trigger
- ✓ Vertical Sensitivity: 1 mV/DIV
- ✓ Horizontal Resolution: 10 nS
- ✓ Hold-Off, X-Y Operation, Z-Mod, Y-Output
- ✓ 23 Calibrated Ranges, Main Time Base

The BOS Series comprises dual-channel oscilloscopes with frequency bandwidths of 40 to 100 MHz at -3 dB, a maximum sweep of 10 ns, a maximum sensitivity of 1 mV/DIV, and 150 mm rectangular CRT with internal graticule.

To Order (Specify Model Number)		
Model No.	Price	Description
BOS-200	\$499	20 MHz analog oscilloscope
BOS-205	640	20 MHz with delay sweep
BOS-350	680	40 MHz analog oscilloscope
BOS-355	799	40 MHz with delay sweep
BOS-605	1110	60 MHz with delay sweep

Accessories

Model No.	Price	Description
BOSP-260	\$30	Replacement oscilloscope probe for 60 MHz bandwidth x1, x10
BOSP-9100	54	Replacement oscilloscope probe for 100 MHz bandwidth x1, x10

Comes complete with power cord, 110V fuse, 220V fuse, plastic screwdriver, 2 probes.

Ordering Examples: BOS-200, 20 MHz analog oscilloscope, \$499.

OCW-3, OMEGACARESM extends standard 1-year warranty to a total of 4 years (\$124), \$499 + 124 = \$623.

Specifications

Models	BOS-200	BOS-205	BOS-350	BOS-355	BOS-605
Cathode Ray Tube	6" diagonal, rectangular screen with internal graticule 8 x 10 DIV (1 DIV = 1 cm), B31 phosphor, 2 kV acceleration voltage				6" diagonal, rectangular screen with internal graticule 8 x 10 DIV (1 DIV = 1 cm), B31 phosphor, 12 kV accel voltage
Vertical Deflection					
Bandwidth	DC to 20 MHz (-3 dB)		DC to 40 MHz (-3 dB)		DC to 60 MHz (-3 dB)
Sensitivity	1 mV/DIV to 1 V/DIV (5 MHz, -3 dB), x5 gain selected 5 mV/DIV to 5 V/DIV		1 mV/DIV to 1 V/DIV (10 MHz, -3 dB), x5 gain selected 5 mV/DIV to 5 V/DIV		1 mV/DIV to 1 V/DIV (15 MHz, -3 dB), x5 gain selected 5 mV/DIV to 5 V/DIV
Attenuator	1-2-5 sequence, 10 step with variable control				
Input Impedance	1 MΩ ±2%, 25 pF ± 10%				
Max Input Voltage	400 V (DC + AC peak)				
Rise Time	About 17.5 ns		About 8.8 ns		About 5.8 ns
Overshoot	Less than 5%				
Operation Mode	CH 1, CH2, DUAL (ALT, CHOP)				
Algebraic Addition	CH 1 + CH 2, CH 1 - CH 2				
Inverter	CH 2 Only				
Horizontal Deflection					
X-Y Mode	Switch slectable using X-Y switch; CH 1: X axis, CH 2: Y axis				
Accuracy	X Axis: ±6%, Y Axis: ±3%				
Bandwidth	DC to 1 MHz (-3 dB)				
X-Y Phase Difference	Approx. 3 degrees at 50 kHz				
Sweep System					
Sweep Display Mode	Main, Mix	Main, Mix, Delay	Main, Mix	Main, Mix, Delay	Main, Mix, Delay
Hold-Off Time	5:1 continuously variable				
Main Sweep					
Sweep Speed	0.1 μs/DIV to 2.0 s/DIV in 1-2-5 sequence, 23 steps				
Accuracy	±3%				
Variable Time Control	5:1, uncalibrated, continuously variable between steps				
Sweep Magnification	10x, ±10%, extended sweep speed up to 10 ns/DIV				
Delay Sweep					
Sweep Speed	0.1 μs/DIV to 2.0 s/DIV in 1-2-5 sequence, 23 steps		0.1 μs/DIV to 2.0 s/DIV in 1-2-5 sequence, 23 steps		
Accuracy	±3%		±3%		
Sweep Magnification	10x, ±10%, extended sweep speed up to 10 ns/DIV		10x, ± 10%, extended sweep speed up to 10 ns/DIV		
Delay Timeposition	Variable control to locate desirable waveform for extending		Variable control to locate desirable waveform for extending		
Triggering					
Trigger Coupling	AUTO, NORM TV-V, TV-H			AUTO, NORM TV-V, TV-H	
Trigger Source	CH 1, CH 2, ALT, LINE, EXT			CH 1, CH 2, ALT, LINE, EXT	
Slope	±			±	
Trigger Sensitivity					
Coupling	TV-V, TV-H, Auto, Nom				
Bandwidth	DC to 1 kHz, 1 kHz to 100 kHz, 100 Hz to 20 MHz, 100 Hz to 20 MHz				
Interior	1.0 DIV, 1.5 DIV, 1.0 DIV, 0.5 Vp-p				
Exterior	0.5 Vp-p				
Dimensions	324 W x 398 D x 132 mm H (12.75 x 15.67 x 5.20")				
Net Weight	Approx. 7.6 kg (16.75 lb)				
Rated Range of Use	10 to 35°C (50 to 95°F), 10 to 80% RH				
Component Test					
Test Voltage	Max 6 Vrms (open circuit)		Max 6 Vrms (open circuit)		
Test Current	Max 11 mA (shorted)		Max 11 mA (shorted)		
Test Frequency	Line frequency		Line frequency		
Components	Capacitor, inductor, diode, transistor, zener, etc.		Capacitor, inductor, diode, transistor, zener, etc.		
CH 2 Output					
Output level	100 mV (no load), 50 mV/DIV (with 50 Ω load)		100 mV (no load), 50 mV/DIV (with 50 Ω load)		
Bandwidth	20 Hz to 20 MHz		20 Hz to 40 MHz		20 Hz to 60 MHz
Graticule Illumination	Adjustable		Adjustable		
Calibrator	Square wave about 1 kHz, 2V p-p ±3%		Square wave about 1 kHz, 2V p-p ±3%		
Z-Modulation	Positive TTL signal, low-level blank intensity at any intensity, high-level unblank any intensity		Positive TTL signal, low-level blank intensity at any intensity, high-level unblank any intensity		
Trace Rotation	Adjustable on front panel		Adjustable on front panel		
Power Source	110 to 130V (800 mA fuse), 200 to 260V (600 mA fuse) 50/60 Hz selectable				
Power Consumption	Approx. 38 W				
Limits of Operation	0 to 50°C (32 to 122°F), 10 to 80% RH				
Storage Environment	-30 to 70°C (-22 to 158°F), 10 to 90% RH				



UNITED STATES

www.omega.com
1-800-TC-OMEGA
Stamford, CT.

CANADA

www.omega.ca
Laval(Quebec)
1-800-TC-OMEGA

GERMANY

www.omega.de
Deckenpfronn, Germany
0800-8266342

UNITED KINGDOM

www.omega.co.uk
Manchester, England
0800-488-488

FRANCE

www.omega.fr
Guyancourt, France
088-466-342

CZECH REPUBLIC

www.omegaeng.cz
Karviná, Czech Republic
596-311-899

BENELUX

www.omega.nl
Amstelveen, NL
0800-099-33-44



More than 100,000 Products Available!

• Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Glass Bulb Thermometers, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders Relative Humidity Measurement Instruments, RTD Probes, Elements and Assemblies, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples Thermowells and Head and Well Assemblies, Transmitters, Wire

• Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

• pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

• Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

• Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Strain Gages, Torque Transducers, Valves

• Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters